

LED Emergency Lighting kit


2 YEARS
GUARANTEE
CONVERTER

1 YEAR
GUARANTEE
BATTERY



Application

- Suitable for installation into indoor luminaires

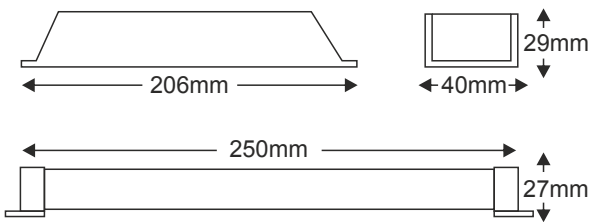

- Red charge indicator light
- Green function indicator light
- Yellow failure indicator light
- Test Button



! This LED emergency kit is designed for constant current operation and can be installed only at luminaires with external LED driver (not built-in)

Technical Data

Housing Material **Polycarbonate**

Input Voltage **230V AC**

Output Voltage **10-80V DC**

Input Frequency **50~60Hz**

Maximum Power Output **max 6W**

Maximum Load **max 50W**

Operation **Maintained / Non Maintained**

Battery Type **6V / 1.5Ah Ni-Cd**

Charging Time **24 hours**

Battery Autonomy **1.5 hours**

Ingress Protection **IP20**

Ambient Temperature Range **0° ~ +50°**

Photometrical Data

Net Weight **0.38kg**

Quantity per Box **1**

Boxes per Master Packing **16**

EAN/UPC **5208055042739**

The technical data of the product may differ from the listed +/- 10%

