

LED SMD STREET LUMINAIRE



Code:  
**BISE9040**

**5** YEARS  
GUARANTEE




**Application**

- Suitable for street lighting

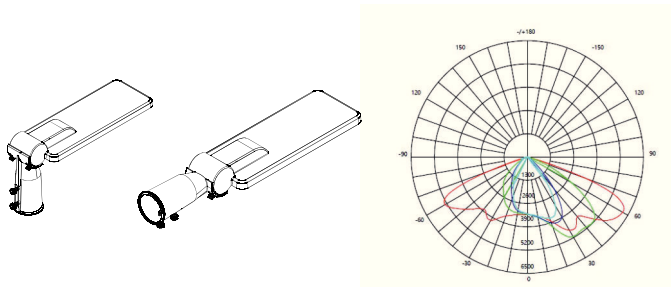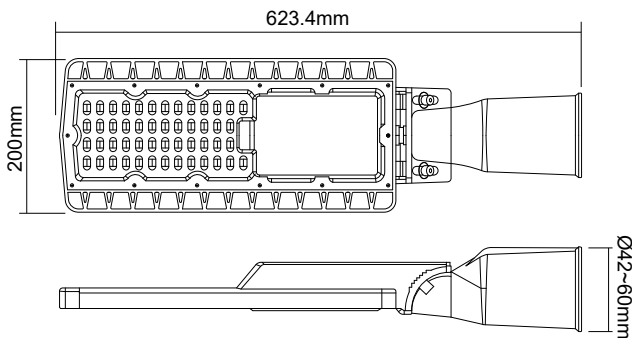

**Technical Data**

Housing Material	Die-casting Aluminum
Optic Material	Clear Polycarbonate
Color	Grey
Input Voltage	100~240V AC
Input Frequency	50~60Hz
Total Wattage	90W
LED Type	BRIDGELUX SMD (LM80)
Lifespan	50.000 hours
Protection Class	CLASS II 
Ingress Protection	IP66
Mechanical Impact Degree	IK08
Surge Protection	10kV
Power Factor	≥0.95
Operation Temperature	-20°~+45°C
LED Driver	Yes (Built-in)
Replaceable LED / Driver	Yes / No

**Photometrical Data**

Color Temperature	4000K
Lumen	12600lm
Light Beam Spread	150°x75°
Color Rendering Index (Ra)	≥70

**Energy Data**

Energy Efficiency Label	C
Energy Consumption	90.0 kWh/1000h

The technical data of the product may differ from the listed +/- 10%



**APOSTOLIDIS TRADING**  
Industrial area of Serres | 62100 Serres, Greece  
T. +30 23210 77020-21 | F. +30 23210 77022  
info@acalight.gr | www.acalight.gr

