

# LED LINEAR LUMINAIRE

ECONOMY SERIES

Code:  
**MILO1240EC**




**5 YEARS**  
GUARANTEE

**TRIDONIC**



## Application

- Suitable for indoor installation
- Suggested for general lighting applications

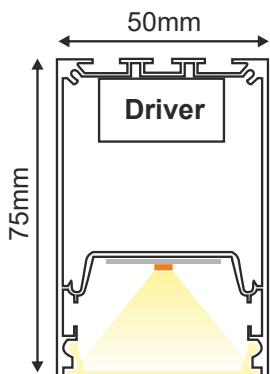

## Technical Data

Housing Material	Anodised Aluminum
Optic Material	Polycarbonate
Color	Upon Request
Input Voltage	230V AC
Input Frequency	50~60Hz
Total Wattage	12W
LED Type	SMD LED MODULE
Lifespan	72.000 hours
Protection Class	CLASS I
Ingress Protection	IP20
Ambient Temperature Range	-20° ~ +50°
Dimming	No
Replaceable LED / Driver	Yes / Yes
Power Factor	≥0.94

## Photometrical Data

Color Temperature	4000K
LED Luminous Flux	1970Lm
Light Beam Spread	120° Symmetrical
Color Rendering Index (Ra)	≥80

## Energy Data

Energy Efficiency Label **D**

The technical data of the product may differ from the listed +/- 10%



**APOSTOLIDIS TRADING**  
Industrial area of Serres | 62100 Serres, Greece  
T. +30 23210 77020-21 | F. +30 23210 77022  
info@acalight.gr | www.acalight.gr

