

LED SMD PANEL

Code:
DEBA60603040

5 YEARS
GUARANTEE

Technical Data

Housing Material **Aluminum**

Optic Material **Plastic opal**

Color **White**


Input Voltage **230V AC**

Input Frequency **50~60Hz**

Total Wattage **30W**

LED Type **SMD**

Lifespan **50.000 hours**

Protection Class **CLASS II** 

Ingress Protection **IP40**

Total Harmonic Distortion (THD) **<10%**

Ripple **±5%**

Power Factor **≥0.90**

Operation Temperature **-20° ~ +40°**

LED Driver **Yes (External)**

Dimming **No**

Replaceable LED / Driver **No / Yes**

Photometrical Data

Color Temperature **4000K**

Lumen **3600Lm**




Light Beam Spread **120° Symmetric**

Color Rendering Index (Ra) **≥80**

Additional Data

Energy Class **E**

Energy consumption **30.0 kWh/1000h**

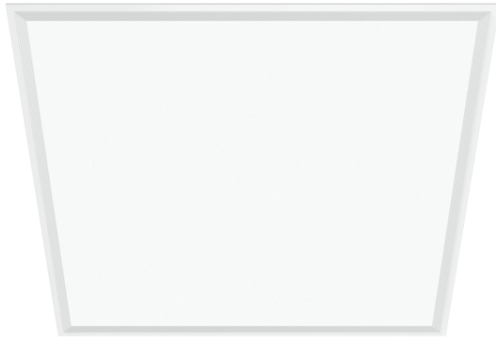

Application

Suitable for indoor installation

Extra Accessories

PENDKIT: Pendant installation kit

SPRINGKITN: Recessed installation kit

FR606065: Ceiling installation frame

The technical data of the product may differ from the listed +/- 10%



APOSTOLIDIS TRADING
Industrial area of Serres | 62100 Serres, Greece
T. +30 23210 77020-21 | F. +30 23210 77022
info@acalight.gr | www.acalight.gr

