

LED SMD HIGH POWER FLOOD LUMINAIRE

Code:



GLAD14405020

**5 YEARS**  
GUARANTEE



**Application**

- Suitable for outdoor installation
- Suggested for stadium lighting

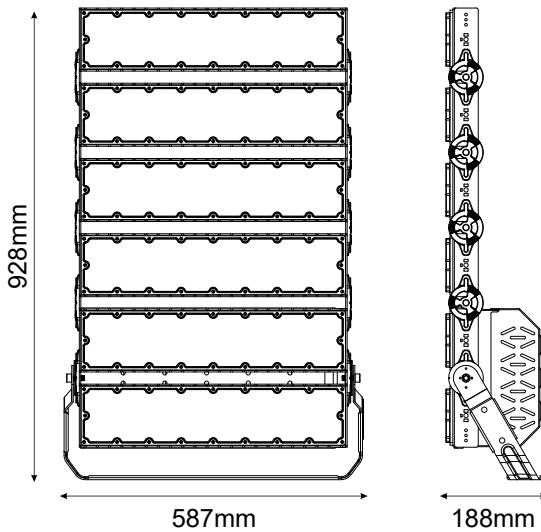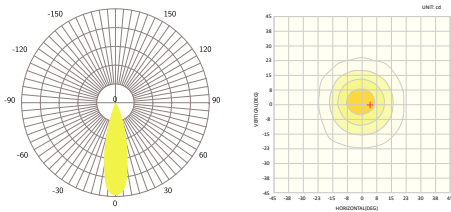

**Technical Data**

Housing Material	Folding Aluminum Fin
Optic Material	Polycarbonate
Color	Black
Input Voltage	230V AC
Input Frequency	50~60Hz
Total Wattage	1440W
LED Type	PHILIPS Lumileds
Lifespan	50.000 hours
Protection Class	CLASS I
Ingress Protection	IP66
Impact Degree	IK10
Surge Protection	10kV
Ambient Temperature Range	-30° ~ +45°
LED Driver	MEANWELL
Dimming	No
Replaceable LED / Driver	Yes / Yes

**Photometrical Data**

Color Temperature	5000K
LED Luminous Flux	223200Lm
Light Beam Spread	20° Symmetrical
Color Rendering Index (Ra)	≥70

**Energy Data**

Energy Efficiency Label	C
Energy Consumption	1440.0 kWh/1000h

The technical data of the product may differ from the listed +/- 10%



**APOSTOLIDIS TRADING**  
Industrial area of Serres | 62100 Serres, Greece  
T. +30 23210 77020-21 | F. +30 23210 77022  
info@acalight.gr | www.acalight.gr

