

LED LINEAR LUMINAIRE

HIGH OUTPUT SERIES




5 YEARS
GUARANTEE

TRIDONIC



Application

- Suitable for indoor installation
- Suggested for general lighting applications

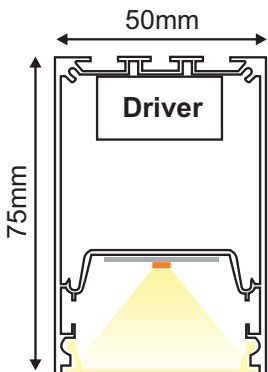

Technical Data

| | |
|---------------------------|---------------------------|
| Housing Material | Anodised Aluminium |
| Optic Material | Polycarbonate |
| Color | Upon Request |
| Input Voltage | 230V AC |
| Input Frequency | 50~60Hz |
| Total Wattage | 41W |
| LED Type | SMD LED MODULE |
| Lifespan | 72.000 hours |
| Protection Class | CLASS I |
| Ingress Protection | IP20 |
| Ambient Temperature Range | -20° ~ +50° |
| Dimming | Yes |
| Replaceable LED / Driver | Yes / Yes |
| Power Factor | ≥0.94 |

Photometrical Data

| | |
|----------------------------|------------------------|
| Color Temperature | 4000K |
| LED Luminous Flux | 7840Lm |
| Light Beam Spread | 120° Συμμετρική |
| Color Rendering Index (Ra) | ≥80 |
| Lighting Transparency | 75% |

Energy Data

| | |
|-------------------------|-----------------------|
| Energy Efficiency Label | B |
| Energy Consumption | 41.0 kWh/1000h |

The technical data of the product may differ from the listed +/- 10%

