

**LED LINEAR LUMINAIRE**

HIGH OUTPUT SERIES




**5 YEARS**  
GUARANTEE

**TRIDONIC**



**Application**

- Suitable for indoor installation
- Suggested for general lighting applications

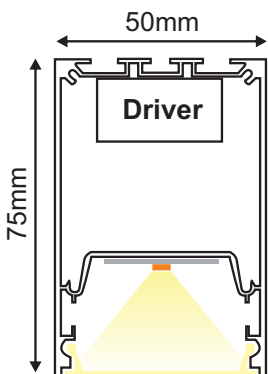

**Technical Data**

|                           |                           |
|---------------------------|---------------------------|
| Housing Material          | <b>Anodised Aluminium</b> |
| Optic Material            | <b>Polycarbonate</b>      |
| Color                     | <b>Upon Request</b>       |
| Input Voltage             | <b>230V AC</b>            |
| Input Frequency           | <b>50~60Hz</b>            |
| Total Wattage             | <b>41W</b>                |
| LED Type                  | <b>SMD LED MODULE</b>     |
| Lifespan                  | <b>72.000 hours</b>       |
| Protection Class          | <b>CLASS I</b>            |
| Ingress Protection        | <b>IP20</b>               |
| Ambient Temperature Range | <b>-20° ~ +50°</b>        |
| Dimming                   | <b>Yes</b>                |
| Replaceable LED / Driver  | <b>Yes / Yes</b>          |
| Power Factor              | <b>≥0.94</b>              |

**Photometrical Data**

|                            |                        |
|----------------------------|------------------------|
| Color Temperature          | <b>4000K</b>           |
| LED Luminous Flux          | <b>7840Lm</b>          |
| Light Beam Spread          | <b>120° Συμμετρική</b> |
| Color Rendering Index (Ra) | <b>≥80</b>             |
| Lighting Transparency      | <b>75%</b>             |

**Energy Data**

|                         |                       |
|-------------------------|-----------------------|
| Energy Efficiency Label | <b>B</b>              |
| Energy Consumption      | <b>41.0 kWh/1000h</b> |

The technical data of the product may differ from the listed +/- 10%

