


LED Emergency sign luminaire


2 YEARS
GUARANTEE
LUMINAIRE

1 YEAR
GUARANTEE
BATTERY

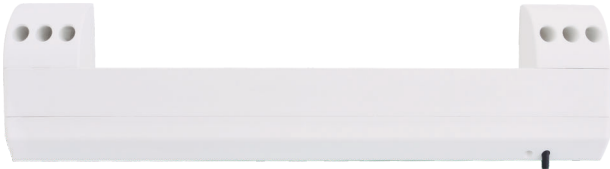


Application

- This luminaire is suitable for indoor installation
- Green function indicator light
- Test Button

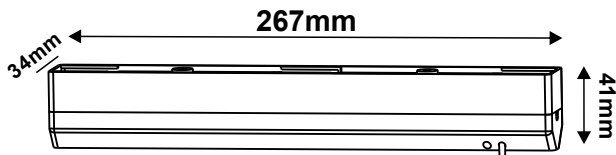

Technical Data

| | |
|---------------------------|--|
| Housing Material | Polycarbonate |
| Color | White |
| Input Voltage | 230V AC |
| Input Frequency | 50~60Hz |
| Total Wattage | 2W |
| LED Type | SMD (LM80) |
| Lifespan | 30.000 hours |
| Protection Class | CLASS II  |
| Operation | Maintained / Non Maintained |
| Battery Type | 3.2V / 0.6Ah LiFePO4 |
| Charging Time | 24 hours |
| Battery Autonomy | 3 hours |
| Ingress Protection | IP20 |
| Ambient Temperature Range | 0° ~ +40° |
| LED Driver | Yes (built-in) |
| Dimming | No |
| Replaceable LED / Driver | No / No |

Photometrical Data

| | |
|----------------------------|-------|
| Color Temperature | 6000K |
| Lumen | 60Lm |
| Color Rendering Index (Ra) | ≥80 |

Energy Data

| | |
|--------------------|---------------|
| Energy Consumption | 2.0 kWh/1000h |
|--------------------|---------------|

The technical data of the product may differ from the listed +/- 10%



APOSTOLIDIS TRADING
Industrial area of Serres | 62100 Serres, Greece
T. +30 23210 77020-21 | F. +30 23210 77022
info@acalight.gr | www.acalight.gr



LED Emergency sign luminaire

Installation accessories (not included)



MYAU
(ARROW UP)



MYAD
(ARROW DOWN)



MYARL
(ARROW LEFT-RIGHT)



MYAEX
(EXIT)



MYAR
(RECESSED INSTALLATION BASE)



MYAS
(PENDANT INSTALLATION KIT)

Indicative installation example



+



The technical data of the product may differ from the listed +/- 10%

