


LED SMD PANEL

Code:
OTIS30603040N

2 YEARS
GUARANTEE



Technical Data

Housing Material	Aluminum
Optic Material	Opal Plastic + PMMA
Color	White
Input Voltage	230V AC
Input Frequency	50~60Hz
Total Wattage	30W
LED Type	SMD
Lifespan	30.000 hours
Protection Class	CLASS II 
Ingress Protection	IP20
Total Harmonic Distortion (THD)	<12%
Ripple	±5%
Power Factor	≥0.90
Operation Temperature	-10° ~ +50°
LED Driver	Yes (External)
Dimming	No
Replaceable LED / Driver	No / Yes
Power Cable + Driver	510mm

Application

Suitable for indoor installation

Extra Accessories

PENDKIT: Pendant installation kit

SPRINGKITN: Recessed installation kit


FR306065: Ceiling installation frame

Photometrical Data

Color Temperature	4000K
Lumen	2850Lm
Light Beam Spread	120° Symmetric
Color Rendering Index (Ra)	≥80

Energy Data

Energy Efficiency Label	F
Energy Consumption	40.0 kWh/1000h

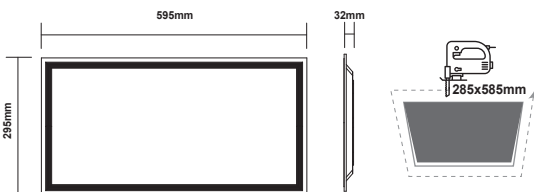

The technical data of the product may differ from the listed +/- 10%

