

LED SMD PANEL


Code:
OTIS60604040N

2 YEARS
GUARANTEE




Εφαρμογή

- Suitable for indoor installation

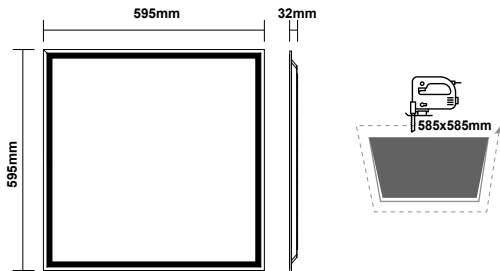

Technical Data

Housing Material	Aluminum
Optic Material	Opal Plastic
Color	White
Input Voltage	230V AC
Input Frequency	50~60Hz
Total Wattage	40W
LED Type	SMD
Lifespan	30.000 hours
Protection Class	CLASS II 
Ingress Protection	IP20
Operation Temperature	-15° ~ +50°
LED Driver	Yes (External)
Dimming	No
Replaceable LED / Driver	No / Yes
Power Cable + Driver	350mm

Photometrical Data

Color Temperature	4000K
Lumen	4000Lm
Light Beam Spread	120° Symmetric
Color Rendering Index (Ra)	≥80

Energy Data

Energy Efficiency Label	F
Energy Consumption	40.0 kWh/1000h

The technical data of the product may differ from the listed +/- 10%

