




LED RECESSED CANOPY LUMINAIRE

5 YEARS
GUARANTEE

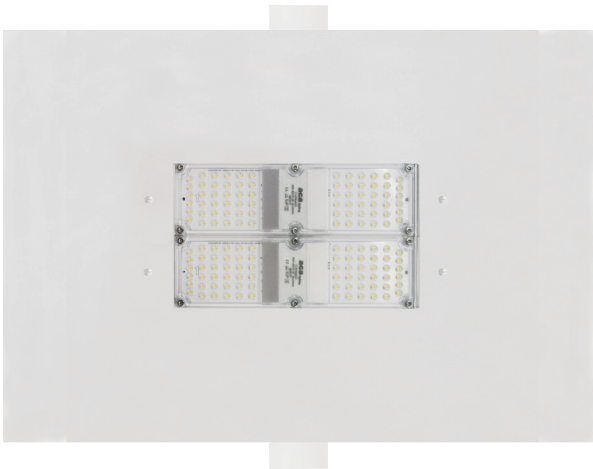

Application

- Suitable for outdoor application
- Suggested for gas station lighting

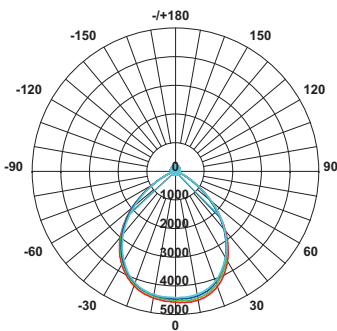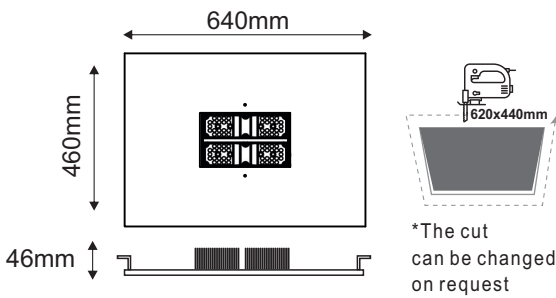

Technical Data

Housing Material	Aluminum+Steel
Optic Material	Polycarbonate
Color	White
Input Voltage	230V AC
Input Frequency	50~60Hz
Total Wattage	120W
LED Type	BRIDGELUX SMD (LM80)
Lifespan	50.000 hours
Protection Class	CLASS I
Ingress Protection	IP66
Mechanical Impact Degree	IK08
Surge Protection	4kV
Total Harmonic Distortion (THD)	<20%
Power Factor	≥0.95
Operation Temperature	-20~+45°C
LED Driver	Built-in
Replaceable LED / Driver	No / No
Power Supply Cable	2*1.00mm² (200mm)

Photometrical Data

Color Temperature	6000K
Lumen	13800Lm
Light Beam Spread	90° Symmetrical
Color Rendering Index (Ra)	≥80

Energy Data

Energy Efficiency Label	D
Energy Consumption	120.0 kWh/1000h

The technical data of the product may differ from the listed +/- 10%

