

LED SMD LINEAR WATERPROOF LUMINAIRE



Code:
RAVI3440NM

5 YEARS
GUARANTEE
TRIDONIC



Application

- Suitable for outdoor installation and for indoor areas with high humidity

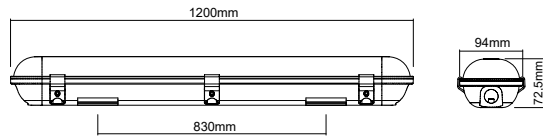

Technical Data

Housing Material	Polycarbonate
Optic Material	Opal Polycarbonate
Color	White+Grey
Input Voltage	230V AC
Input Frequency	50~60Hz
Total Wattage	34W
LED Type	TRIDONIC SMD (LM80)
Lifespan	50.000 hours (L70 F10)
Protection Class	CLASS II
Ingress Protection	IP66
Mechanical Impact Degree	IK09
Ripple	±5%
Total Harmonic Distortion (THD)	<20%
Power Factor	≥0.90
LED Driver	Yes (Built in)
Dimming	No
Replaceable LED / Driver	Yes / Yes

Photometrical Data

Color Temperature	4000K
Lumen	4900Lm
Light Beam Spread	120° Symmetric
Color Rendering Index (Ra)	≥80

Energy Data

Energy Efficiency Label	D
Energy Consumption	34.0 kWh/1000h

The technical data of the product may differ from the listed +/- 10%



APOSTOLIDIS TRADING
Industrial area of Serres | 62100 Serres, Greece
T. +30 23210 77020-21 | F. +30 23210 77022
info@acalight.gr | www.acalight.gr

