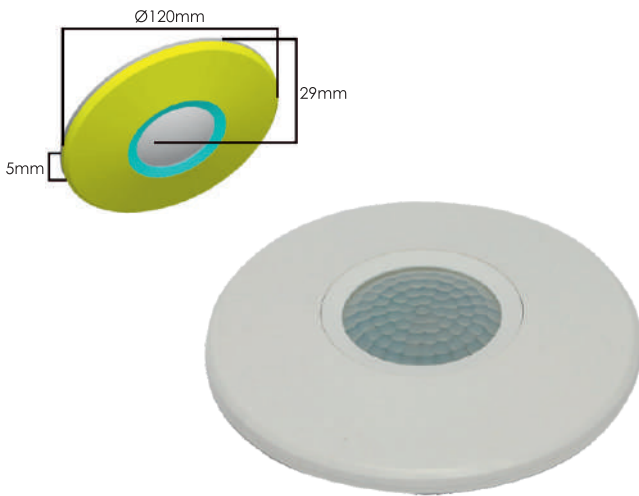


PIR MOTION DETECTOR CEILING MOUNTED

 Code:
ELPIRC6MDISC
**3 YEAR
GUARANTEE**


Features:


PIR Motion detector, which is functioning according to whether there is motion within its range field and it controls the on and off function of other loads (lights), of 2000W maximum in case of incandescent lamps and 1000W max in case of CFL or LED lamps. It consists of infrared sensors and function Lux adjustment trimmer. When motion is spotted within the detection range of the product, the detector is activated and it turns the load on. The load is switched off after the preset time of delay which can vary between 10sec ± 3sec to 10min ± 3min, when no other motion is detected.

- It offers savings and comfort by controlling the lighting loads based on the human movement.
- Simple and easy lux/ time/ lens adjustment.
- It combines practicality with a modern design.

Specifications

Rated Wattage	2000W incadescent lights 1000W CFL-LED lights
Rated Voltage	220V ~ 240V
Frequency	50Hz ~ 60Hz
Power Consumption	~0,5W
Detection Range	360°
Detection Distance	2m ~ 6m max (<24°C) adjustable
Time Delay	10sec ± 3sec to 10min ± 3min adj.
Ambient Light	<10Lux ~ 2000 Lux adjustable
Detection Moving Speed	0.6m/s ~ 1.5m/s
IP Protection	IP20
Working Temperature	-20°C ~ +40°C
Working Humidity	< 93%RH
Type of installation	Οροφής
Installation height	2.2m ~ 4m
Color	White
Certification	LVD 2014/35/EU RoHS 2011/65/EU

Connection:

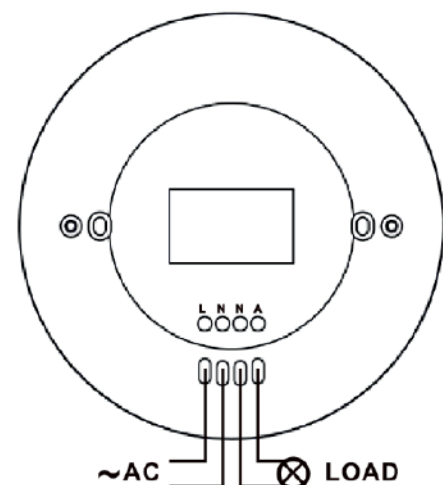

Additional Data

 Quantity per Box **1**

 Boxes per Master Packing **50**

 EAN/UPC **5208055091331**

The technical data of the product may differ from the listed +/- 10%



APOSTOLIDIS TRADING
 Industrial area of Serres | 62100 Serres, Greece
 T. +30 23210 77020-21 | F. +30 23210 77022
 info@acalight.gr | www.acalight.gr

